SL58



Bulo

Product Specification Sheet

The SL58 chair was designed in 1958 by Stynen for the World Expo in Brussels. In 2016 Bulo reissued the chair in close collaboration with the Stynen family. The SL58 is available as a low lounge chair, a dining chair, an office chair with a 5-star base on castors, a counter height barstool and a high barstool. In 2018 we added a polypropylene version to the collection, allowing the chair to be used outdoors as well. This newest addition was named the 'SLL18'.



Léon Stynen



Léon Stynen (1899-1990), son of a sculptor and a decorative artist, studied architecture at the Antwerp Academy. His contemporaries included Bourgeois, De Koninck, Hoste, Van Doesburg, Gropius and Le Corbusier - who was a main source of inspiration and a dear friend. Stynen's work as an architect spans more than half a century of Belgian architectural history, with a vast number of successful and multi-faceted projects, Amongst them are deSingel International Art Center that opened in 1980. Stynen was also very active in education and had a role in defining the architectural studies in Belgium.

Content

Specifications	4
Types	5
Dimensions	7
Materials	9
Upholstery Fabrics	11
Upholstery Leather	15



Specifications

The plywood shell is composed out of FSC certified veneer.

Water-based lacquers that are used meet the most strict european norms.

Steel is certified with ISO 9001:2015, ISO 14001:2015

Foam is certified, CRIB5

--For intensive use, it is recommended to use chrome or champagne.
- Upholstery uses fire-retardant foam, CRIB5 (15 mm on seat, 45 kg / m3 density)

- Anti-skid glides can be supplied in plastic or felt.
- The shell consists of 8 layers of beech veneer (including 2 layers of AA-quality beech veneer) and is attached to the metal frame by means of black bolts and cap nuts.

Types

SL58 on 4 legs



SL58 desk chair



SL58 high bar stool



SL58 counter height stool



Types

SL58 bench with 4 seats

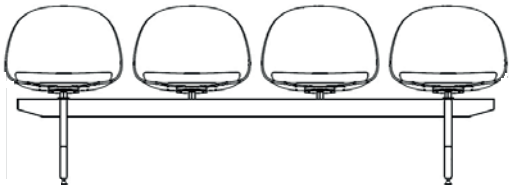

SL58 lounge chair



Dimensions

SL58 on 4 legs

w 540 mm
d 560 mm
h 810 mm

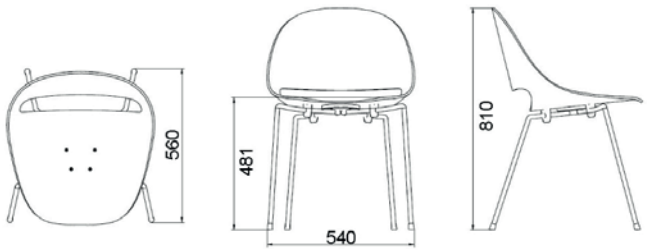

SL58 desk chair

w 570 mm
d 570 mm
h 770-900 mm

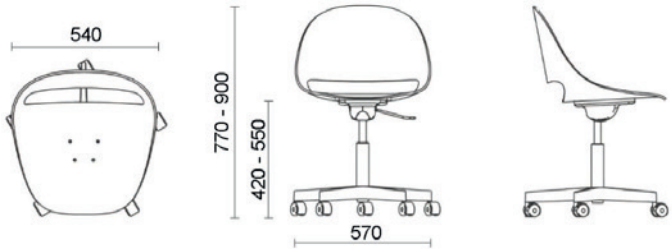

SL58 high bar stool

w 540 mm
d 600 mm
h 1114 mm

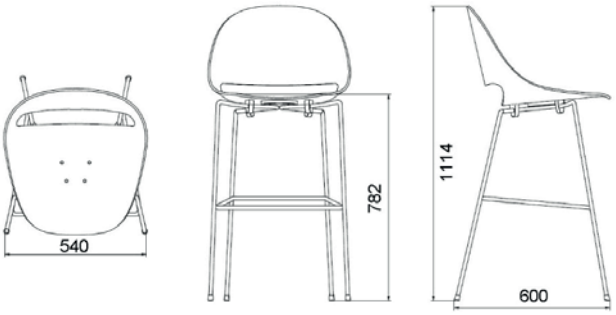

SL58 counter height stool

w 535 mm
d 540 mm
h 970 mm

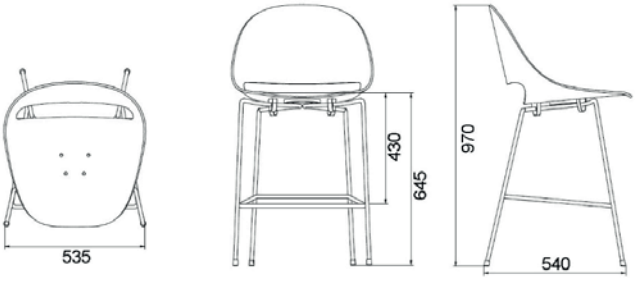

Dimensions

SL58 bench with 4 seats

w 540 mm
d 560 mm
h 810 mm

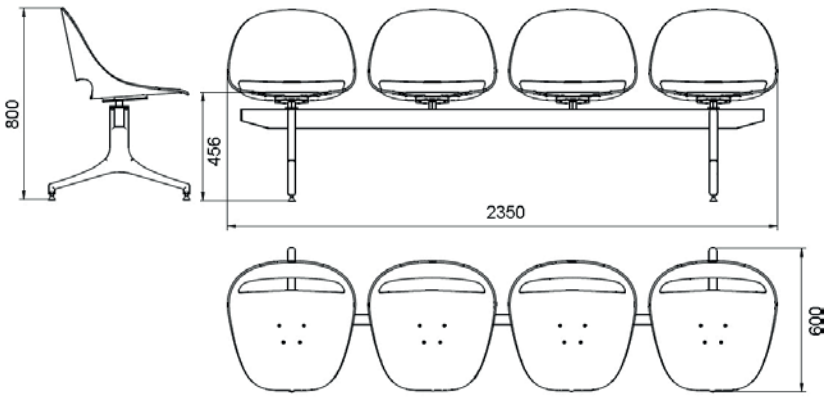

SL58 lounge chair

w 535 mm
d 575 mm
h 705 mm



Materials

Frame

Lilly White Lacquered



Black Lacquered Red

Lacquered Yellow



Chrome



Champagne

Plywood Shell - Wood

Anti-skid glides for all types of floors

Plywood Shell - Wood



Natural Beech

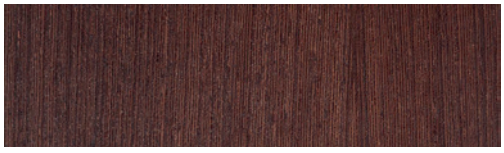

stained in Santos Rose Wood color

Materials

Plywood Shell - Lacquer

Lilly White



Light Grey



Dark Grey



Black



Red

Yellow

Upholstery Fabrics

Ronny Category: 1 | RO503



Composition 49% wool, 34% cotton, 17% nylon
Weight 500g/lin.m

Abrasion 50.000 Martindale rubs, ISO 12945
Pilling 4, ISO 12945.
Fastness to light 5, ISO 105-B02

Flammability BS 5852 Cigarette test, EN 1021-1 Cigarette test, EN 1021-2 Match test

Main Line Flax Category: 1 | MLF02



Composition 70% Pure New Wool, 30% Flax
Weight 13 oz/sq yd

Abrasion ≥100,000 double rubs, ASTM D4157 Wyzenbeek method
Fastness to light 4, AATCC-16 (40 hours)

Flammability California Technical Bulletin 117 - 2013, NFPA 260 + UFAC Class 1, BS 7176 Low Hazard, ASTM E84 Class 1 or A (Adhered)

Duffy Category: 1 | DU028



Extrema AU Category: 1 | EX2250



Composition: 63% Polyurethane - 29% COT 8% Polyester
Weight: 480 g/m2

Abrasion: 150.000 Martindale rubs, ISO 12947-2
Fastness to light: 5/6, IISO 105-B02

Flammability
UNI 9175 classe 1 IM, EN 1021 part. 1-2, BS 5852 crib 5, BS 5852 Source 1, IMO 2010 FTP CODE | TB 117: 2013

Blazer Category: 2 | CUZ2Q



Composition 100% Pure New Wool
Weight 13 1/2 oz/sq yd

Abrasion ≥75,000 double rubs, ASTM D4157 Wyzenbeek method
Fastness to light 4, AATCC-16 (40 hours)

Flammability California Technical Bulletin 117 - 2013, NFPA 260 + UFAC Class 1, BS 7176 Low Hazard, ASTM E84 Class 1 or A (Adhered)

Credo Category: 2 | Lampion



Composition 95% New Wool, 5% PA (polyamide)
Weight 610 g/m² - 870 g/lfm

Abrasion 100.000 rubs, ISO 12947-2
Pilling ≥ 4-5 , ISO 12945-2
Fastness to light ≥ 5, ISO 105-B02

Flammability FAR 25.853 (12 sec. vertical), CAL TB 117 - 2013, DIN 4102-1 B2, DIN EN 13501-1, DIN EN 1021 -1 und -2, BS 5852:1979 (part1), BS 5852:2006 (part2) Crib5, BKZ: 5.3 SN 198898, UNI 9175 (1 IM), NF P92 503-507 M2, IMO: 2014/90/EU Marine Equipment Directive

Re-wool Category: 2 | RW-198



Composition 5% New wool (worsted), 45% Recycled wool, 10% Nylon
Weight 540 g/lin.m
Sustainability Complies with EU ecolabel “The Flower”

Abrasion 100.000 Martindale
Pilling 4
Fastness to light 7

Flammability BS 5852 Crib 5 with treatment, BS 5852 ignition source 3, BS 5852 part 1, EN 1021-1/2, NF D 60 013, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/ Q1, AS/NZS 3837 Class 2

Topia Category: 2 | Coral



Composition 95% Wool, 5% PA
Weight 440 g/m² - 660 g/lfm

Abrasion 50.000 rubs, ISO 12947-2
Pilling ≥ 4-5, ISO 12945-2
Fastness to light ≥ 5, ISO 105-B02

Flammability FAR 25.853 (12 Sek. vertikal), CAL TB 117 - 2013, DIN 4102-1 B2, DIN EN 13501-1, DIN EN 1021 -1 and -2, BS 5852:1979 (part1), BS 5852:2006 (part2) Crib5, BKZ: 5.3 SN 198898, UNI 9175 (1 IM), IMO: 2014/90/EU Marine Equipment Directive, Train: EN 45545-2 R21 ISO 5660-1 (HL3)

Canvas Category: 3 | CA356



Composition 90% New wool (worsted), 10% Nylon
Weight 480 g/lin.m

Abrasion 100.000 Martindale
Pilling 4
Fastness to light 6

Flammability AS/NZS 1530.3, BS 5852 part 1, EN 1021-1/2, IMO FTP Code 2010 Part 8, NF D 60 013, NFPA 260, SN 198 898 5.3 with treatment, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/ Q1, BS 5852 ignition source 3, BS 5852 Crib 5 with treatment

Steelcut 2 Category: 3 | CT110

Composition 90% New wool (worsted), 10% Nylon
Weight 825 g/lin.m
Sustainability Complies with EU ecolabel “The Flower”

Abrasion 100.000 Martindale
Pilling 3-4
Fastness to light 6

Flammability AS/NZS 3837, class 2, BS 5852 part 1, EN 1021-1/2, IMO FTP Code 2010 Part 8, NF D 60 013, SN 198 898 5.3 with treatment, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/ Q1, BS 5852 Crib 5 with treatment, NFPA 260, AS/NZS 1530.3

Hallngdal 65 Category: 3 | HA126



Composition 70% New wool, 30% Viscose
Weight 795 g/lin.m
Sustainability Complies with EU ecolabel “The Flower”

Abrasion 100.000 Martindale
Pilling 3-4
Fastness to light 7

Flammability AS/NZS 1530.3, BS 5852 Crib 5, BS 5852 part 1, EN 1021-1/2, IMO FTP Code 2010 Part 8, NF D 60 013, NFPA 260, SN 198 898 5.3 with treatment, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/ Q1, BS 5852 ignition source 3

Steelcut Trio 3 Category: 3 | TR916



Composition 90% New wool (worsted), 10% Nylon
Weight 770 g/lin.m
Sustainability Complies with EU ecolabel “The Flower”

Abrasion 100.000 Martindale
Pilling 4
Fastness to light 5

Flammability AS/NZS 3837, class 2, BS 5852 part 1, EN 1021-1/2, IMO FTP Code 2010 Part 8, NF D 60 013, NFPA 260, SN 198 898 5.3 with treatment, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/ Q1, BS 5852 Crib 5 with treatmen, AS/NZS 1530.3, BS 5852 ignition source 3

Upholstery Leather

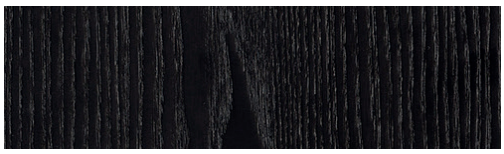

AB Solid Ash
Black Lacquered



AB Solid Ash
Natural



Pearl



Warm Grey

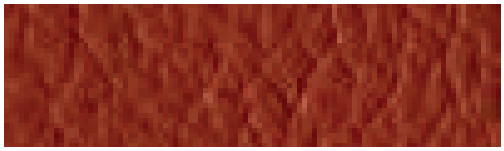

Sienna

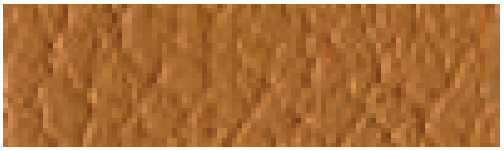

Mustard



Dark Brown



Black